

RE-LS30B

Bi-DIRECTIONAL PROJECTION SPEAKER


Features

- Two 10 CM Dynamic cone speakers fitted at both the ends of the unit suitable for both speech and music providing quality sound for all requirements.
- Three field selectable power taps.
- Fitted with an adjustable U bracket for easy installation.
- Ideal for installation in covered areas which are not susceptible to rain or excessive dampness.
- Better sound quality for paging, announcement and background music.
- ABS plastic grill at both the ends finished with matt grey.



Specification

Electrical Specification	
Power	30W
Tappings 100V Line	5W/ 10W / 15W
Sound Pressure Level	94dB (1W, 1M)
Frequency	275 – 7000 Hz
Material	ABS Plastic
Dimensions	ø 155 mm, D 203 mm.
Weight (Approx.)	1.90Kg

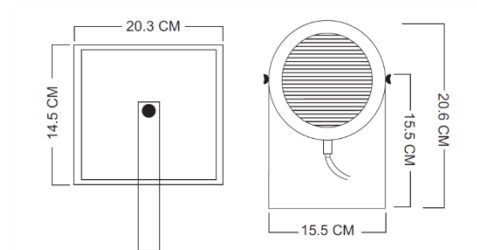

Mounting Detail

Applications

Banks, Offices, Restaurants, Factories, Lobbies.

Ordering Information

Model	Description
RE-LS30B	Bi-Directional Projection Speaker

India

RAVEL ELECTRONICS PVT LTD.,
150A, Electronics Industrial Estate,
Perungudi, Chennai – 96, India.
E-mail: sales@ravelfire.com; Web: www.ravelfire.com

UAE

RAVEL DMCC,
Unit No: G30, DMCC Business Center,
Level No 13, AG Tower, Dubai, UAE.
E-mail: sales@raveldmcc.com

USA

RAVEL AMERICAS INC.,
2855 NW 112th Ave ST#2 Miami,
Doral, Florida 33172, USA.
E-mail: sales.us@ravelfire.com