


RE - 517MMC MIMIC CARD

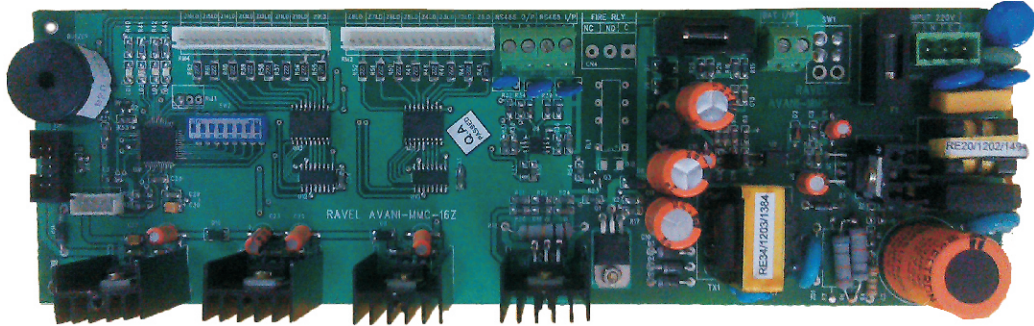

Features:

- Operates on 120 -220 V AC .
- Provision for battery backup 24V DC with built in charger.
- RS 485 communication.
- Compatible with Avani.
- 16 Zone outputs for mimic LED'S (Expandable upto 64 Zones).
- DIP switch addressing.
- Zone event operation.

Electrical Specification

1. Power Supply

Primary Power	: 120 -220V AC, 60/50 Hz
Standby Power	: 24V DC
Charging Power	: 28V, 0.5 A

2. Operating Conditions

Operating Temperature	: 0-49 °C / 32-120 °F
Relative Humidity	: 93 ± 2% RH.
Operating Current	: 0.05Amps + 0.01 Amps / Zone (LED)

Ordering Information:

MODEL	DESCRIPTION
RE-517MMC	Mimic Card (16 / 32 / 64 LED's)

India:

RAVEL ELECTRONICS PVT LTD.,
(An ISO 9001 Company)
150A, Electronics Industrial Estate, Perungudi, Chennai - 96 .India.
E-Mail: marketing@ravelfire.com; Web : www.ravelfire.com

United Kingdom:

RAVEL ELECTRONICS LTD.,
Unit 11, Chancel Industrial Estate, Newhall street,
Willenhall WV13 1NX, West Midlands, United Kingdom.
E-mail: info@ravelfire.co.uk ;Web: www.ravelfire.co.uk