RE -737MI

Analogue Addressable Isolator Module



Product Overview:

The Isolator module is an automatic device that isolates a part of the loop by opening when the line voltage drops below 14Volts. These modules should be spaced between groups of sensors or modules in a loop to isolate the faulty area from the rest of the loop. If a short occurs between any two isolators, then both isolators immediately switch to an open state and isolate the devices between them. The remaining units on the loop continue to fully operate. A maximum of 20 devices recommended to connect each isolator. The module blinks to normal status and glow steady when activated.



Features:

- Module Status by YELLOW LED.
- · Low Standby Current.
- · Available with suitable back boxes

Electrical Characteristics

Min Supply Voltage (Vmin) : 17V
Max Supply Voltage(Vmax) : 28VDC
Nominal Supply Voltage(V_{nom}) : 24VDC
Quiescent Current at 24V(Ic) : 30μA

Leakage Current at 24V(I_L)
2 mA when isolating
Max Curent (through loop)(I_s)
1A continuous, 3A Peak


Isolating Voltage (Vco) : <14V
Maximum on resistance(Zc) : 0.02Ω
Re-connect Voltage(Voc) : 14 ~ 16V

Mechanical Specification:


Dimensions : (95 W X 75 H X 24D) mm

Color : Black Weight : 0.35Kg


G.A.Diagram:

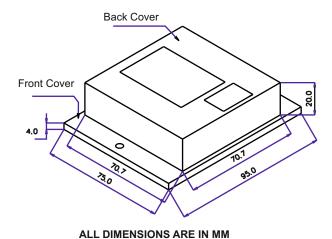

Mounting Detail:

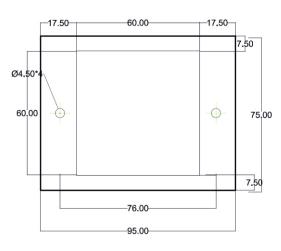

Wiring Configuration

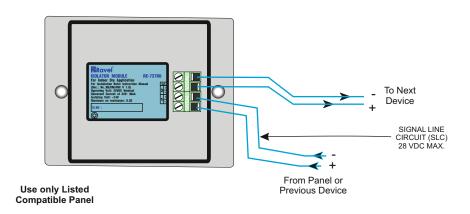

Compatible Devices:

MODELS	DESCRIPTION
Monitl	Analogue Addressable Fire Alarm Control Panel

Ordering Information:

MODEL	DESCRIPTION
RE - 737MI	Analogue Addressable Isolator Module

India:

RAVEL ELECTRONICS PVT LTD.,

(An ISO 9001 Company)

150A, Electronics Industrial Estate, Perungudi, Chennai - 96 India. E-Mail: marketing@ravelfire.com; Web: www.ravelfire.com

United Kingdom:

RAVEL ELECTRONICS LTD.,

Unit 11, Chancel Industrial Estate, Newhall street, Willenhall WV13 1NX, West Midlands, United Kingdom. E-mail: info@ravelfire.co.uk;Web: www.ravelfire.co.uk